




# Round Tapered Aluminum Pole



- If supplied, the festoon box is installed at 5m height. Notify Métal Pole Lite if different mounting height is required.
- Hand hole ring mounting height is 20" to centre and comes with hand hole cover
- Wind speeds (mph) in the table denote the maximum wind gust speed at the project site (i.e. gust factor included).
- Maximum EPA rating includes fixture(s) and supporting arm(s) and is for standard pole installation on concrete bases/footings.
- All poles are supplied with nut covers, shims and top plastic cap.
- Pole designs based on AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals.
- Contact Sales Team for custom sizes and/or applications.
- Specific information and details may be subject to change without notice.
- Please see Warranty and Terms & Conditions.

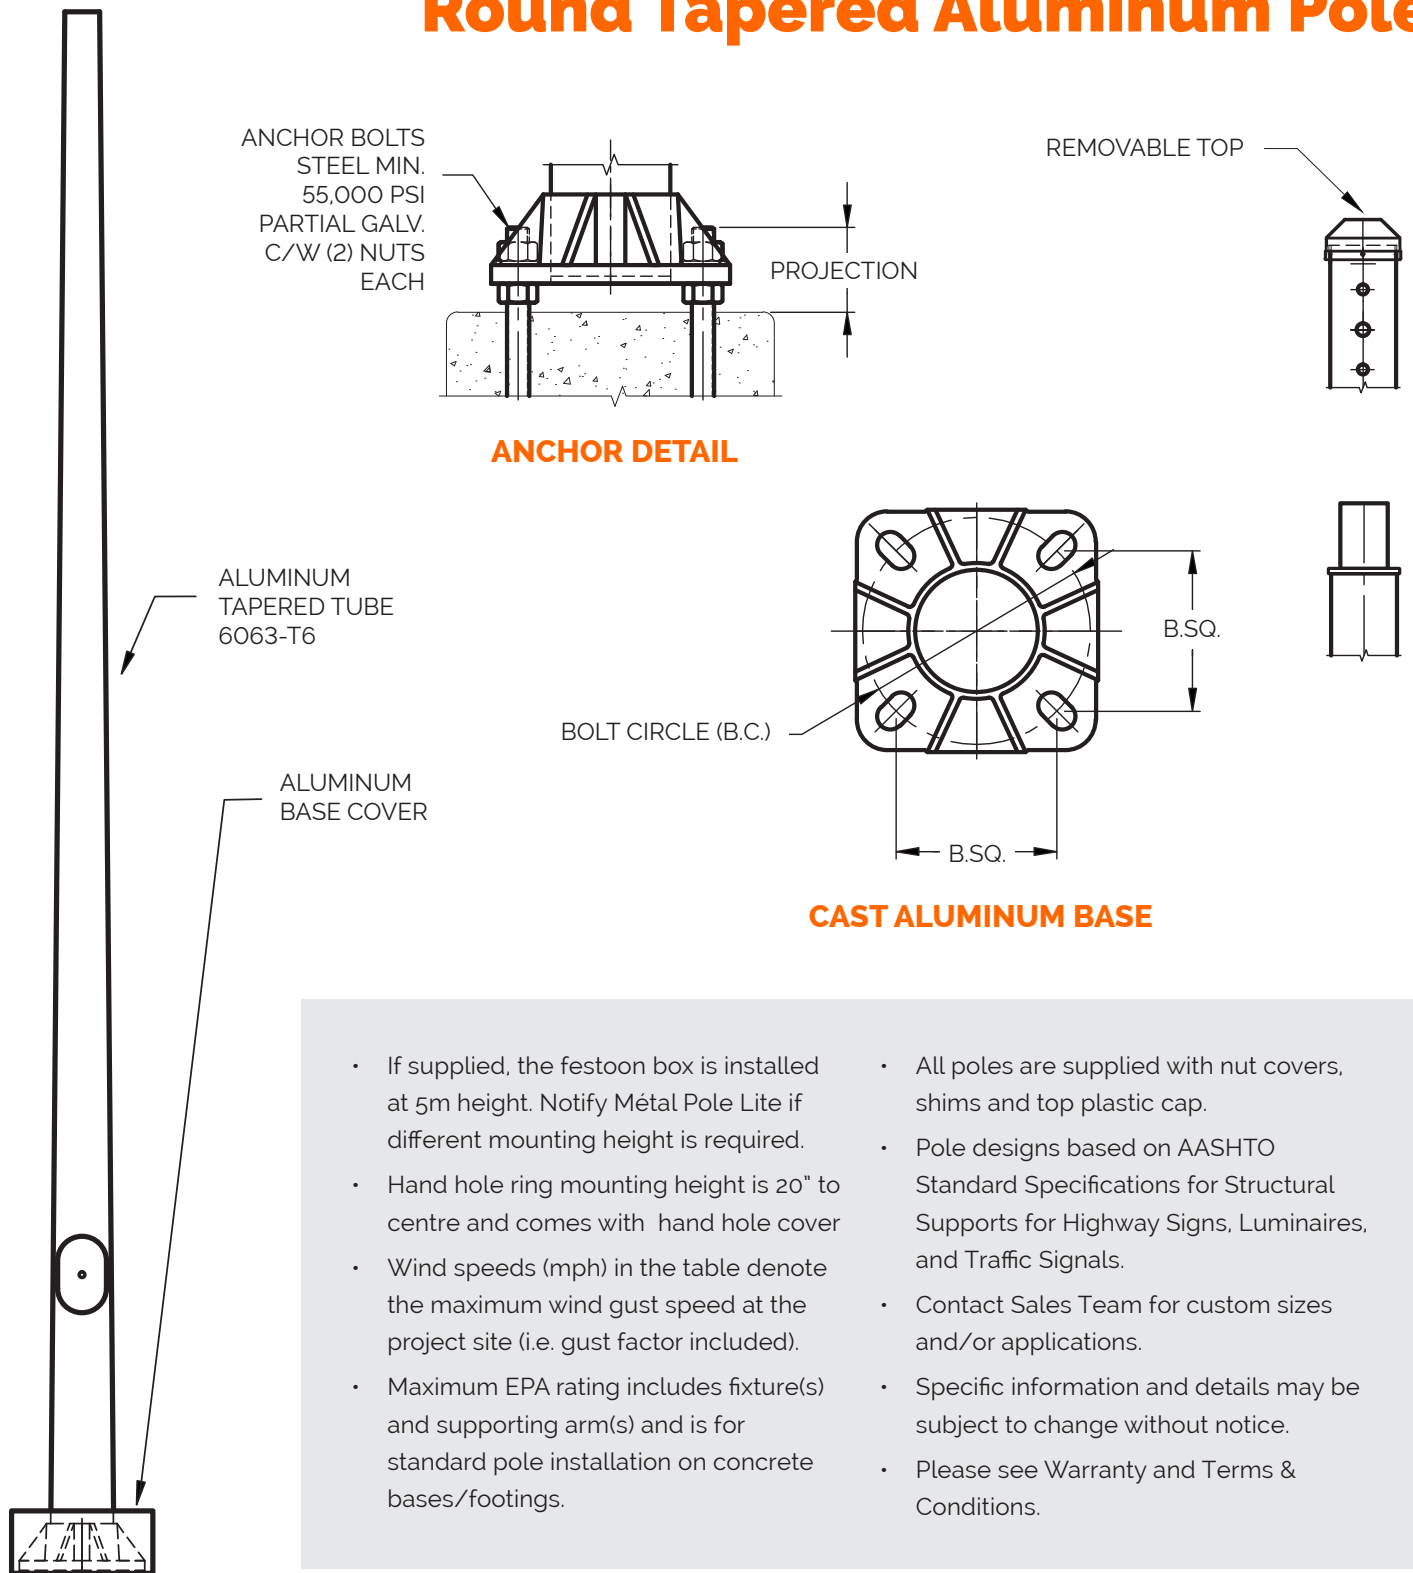

# Round Tapered Aluminum Pole

<b>CATALOGUE #</b>		<b>FIXTURE INFO</b>
<b>PROJECT NAME</b>		
<b>CITY</b>		
<b>PREPARED BY</b>	<b>DATE</b>	
<b>COMMENTS</b>		
		<b>QUANTITY</b>
		<b>EPA (sq.ft.)</b>
		<b>WEIGHT (lbs)</b>

Catalogue #	Pole Size (in)	Pole Ht. (ft)	Pole Type	B.C. (B.SQ.)	Anchor Bolt Size	Proj.	Handhole Size	Maximum EPA (sq.ft.)			
								80MPH	90MPH	100MPH	110MPH
RTA10-4LD	4	10	LD	7.5" (5.31')	3/4" x 24"	4"	3" x 5"				
RTA12-4LD	4	12	LD	7.5" (5.31')	3/4" x 24"	4"	3" x 5"				
RTA15-5LD	5	15	LD	8.5" (6.0')	3/4" x 24"	4"	3" x 5"				
RTA15-5MD	5	15	MD	8.5" (6.0')	3/4" x 24"	4"	3" x 5"				
RTA18-5MD	5	18	MD	8.5" (6.0')	3/4" x 24"	4"	3" x 5"				
RTA18-6MD	6	18	MD	9.5" (6.75')	1" x 36"	4.75"	3" x 5"				
RTA20-6LD	6	20	LD	9.5" (6.75')	1" x 36"	4.75"	3" x 5"				
RTA20-6MD	6	20	MD	9.5" (6.75')	1" x 36"	4.75"	3" x 5"				
RTA20-7MD	7	20	MD	10.5" (7.45')	1" x 36"	4.75"	4" x 6.5"				
RTA25-7MD	7	25	MD	10.5" (7.45')	1" x 36"	4.75"	4" x 6.5"				
RTA25-8MD	8	25	MD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA25-8HD	8	25	HD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA30-8MD	8	30	MD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA30-8HD	8	30	HD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA30-10MD	10	30	MD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				
RTA35-8MD	8	35	MD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA35-8HD	8	35	HD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA35-10MD	10	35	MD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				
RTA35-10HD	10	35	HD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				
RTA40-8HD	8	40	HD	11.5" (8.12')	1" x 36"	4.75"	4" x 6.5"				
RTA40-10MD	10	40	MD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				
RTA40-10HD	10	40	HD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				
RTA45-10MD	10	45	MD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				
RTA45-10HD	10	45	HD	14" (9.87')	1" x 36"	4.75"	4" x 6.5"				

Please contact Métal Pole-Lite for EPA rating.

## Order Entry Info

POLE SPECS	MOUNTING TYPE (See Note 1)	FINISH TYPE	PC COLOUR	OPTIONS	
10' - 4" (LD)	<b>TOP TENON MOUNT</b> <b>TT2</b> - 2 3/8" x 4" tenon <b>TT3</b> - 2 7/8" x 4" tenon	<b>PC</b> - Powder Coated  <i>For Powder Coated, please select Colour from next column</i>	<b>BLK</b> - Black  <b>BZ</b> - Bronze  <b>BR</b> - Brushed  <b>CC</b> - Custom Colour (RAL- ) <i>(Additional charges may apply)</i>  <b>N</b> - None	<input type="checkbox"/> <b>DUPR</b> - 1110 Box Provision (Festoon Box) <input type="checkbox"/> <b>DUPRGFI</b> - 1110 Box Provision c/w 15A 120V GFI Receptacle and Weatherproof Cover <input type="checkbox"/> <b>BCP</b> - Type 4 Plastic Base Cover <input type="checkbox"/> <b>BCCS</b> - Type 4 Cast Square Base Cover <input type="checkbox"/> <b>HHSS</b> - Hand Hole Security System <input type="checkbox"/> <b>FBA1</b> - Flower Basket Arm One Side (See Note 2) <input type="checkbox"/> <b>FBA2</b> - Flower Basket Arm Dual (See Note 2) <input type="checkbox"/> <b>BA1</b> - Banner Arms One Side (See Note 3) <input type="checkbox"/> <b>BA2</b> - Banner Arms Dual (See Note 3) <input type="checkbox"/> <b>AB</b> - Anchor Bolts <input type="checkbox"/> <b>BH</b> - Bullhorns <input type="checkbox"/> <b>N</b> - None	
12' - 4" (LD)					<b>SIDE TENON MOUNT</b> <i>Dimensions: 2 3/8" dia. x 5" long</i> <b>ST1</b> - Single Head <b>ST2</b> - 2 Heads at 90° <b>ST2B</b> - 2 Heads at 180° <b>ST3</b> - 3 Heads at 90° <b>ST4</b> - 4 Heads at 90°
15' - 5" (LD)					
15' - 5" (MD)					
18' - 5" (MD)					
18' - 6" (MD)					
20' - 6" (LD)					
20' - 6" (MD)					
20' - 7" (MD)					
25' - 7" (MD)					
25' - 8" (MD)					
25' - 8" (HD)					
30' - 8" (MD)					
30' - 8" (HD)					
30' - 10" (MD)					
35' - 8" (MD)					
35' - 8" (HD)					
35' - 10" (MD)					
35' - 10" (HD)					
40' - 8" (HD)					
40' - 10" (MD)					
40' - 10" (HD)					
45' - 10" (MD)					
45' - 10" (HD)					
<b>Pole Specs</b>	<b>Mounting</b>	<b>Finish Type</b>	<b>PC Colour</b>	<b>Options</b>	
RTA					

Pole Type: LD = 0.125", MD = 0.188", HD = 0.250"

Sample Catalogue #: RTA20-6MD-ST1-PC-BLK-HHSS-BA1

Note 1: Please provide fixture cutsheet.

Note 2: Please provide basket weight, arm length and mounting height.

Note 3: Please provide banner size and mounting height.

Reset Order Entry Form